


CANnector LE

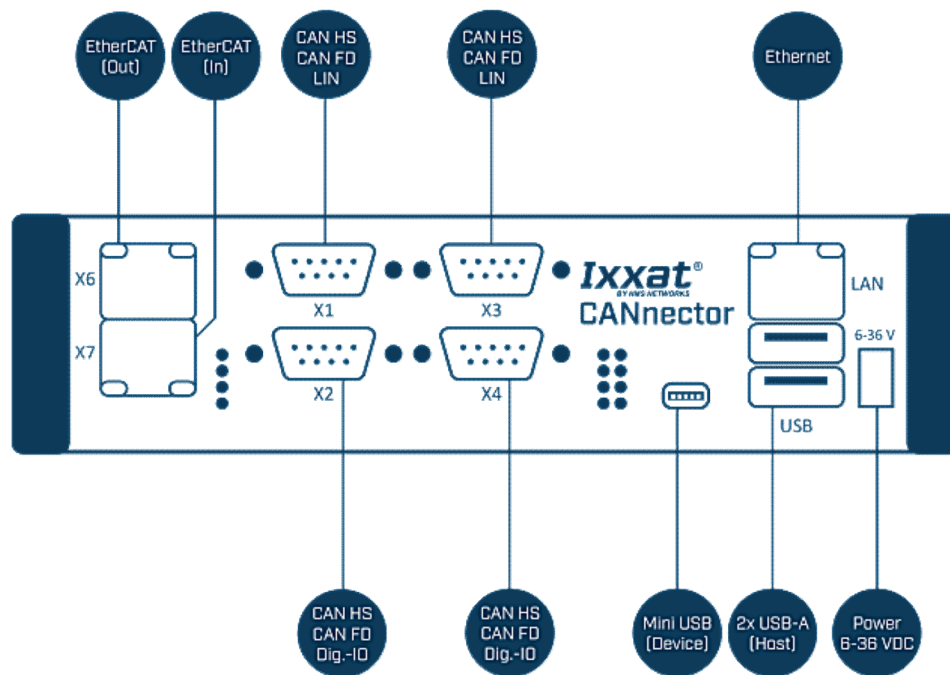

The Ixxat CANnector LE is a powerful platform, ideally suited for e-mobility and automotive applications by merging multiple bus systems into a single device. It features two LIN and up to eight CAN channels, four of which are CAN FD capable, including Industrial Ethernet support – easily configurable with the Ixxat Advanced Configuration Tool (ACT).

Specifications

Net Width (mm)	113 mm
Net Height (mm)	196mm
Net Depth (mm)	43 mm
Net Weight (g)	1150g
Mounting	DIN rail mount (bracket included)
Current Consumption Type Value at Vcc Nom (mA)	420 mA (12 V DC)
Input Voltage (V)	9 V to 36 V DC
Power Connector	3-pole
Operating Temperature °C Min	-40 °C
Operating Temperature °C Max	85 °C
Storage Temperature °C Min	-40 °C
Storage Temperature °C Max	85 °C